


## 2 x 1/4 Bridge Digital Monitor For Strain and Force Type SML-DM1DA

**The perfect help for Clamping force & strain reading  
Without Overloading Toggle or Tie Bars**



- Idea for online measuring.
- Avoid tie bar broken.
- Keep mould and machine aligned
- Extend die and bushing life.
- Less mould wear and flashing.
- Repeatable setup from run to run.
- RS 485 output port (option), idea for Industrial 4.0 production monitoring.

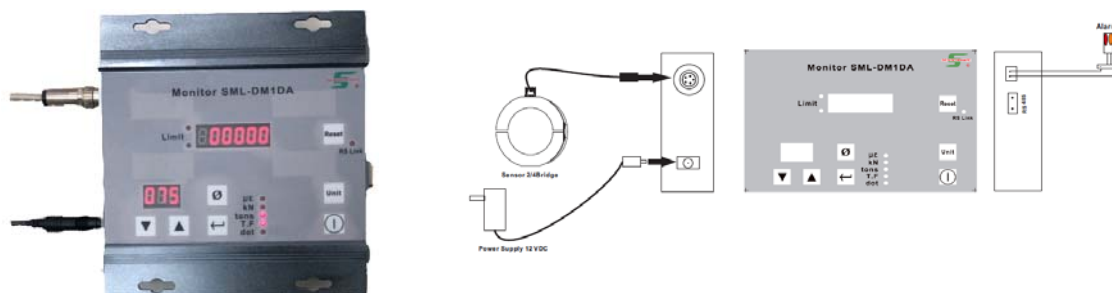

The tie bar stretch in automatically measured bending compensated. This is for fastest results and direct total clamping force indication with 1% accuracy.

### Feature :

- Sensors for bending compensated measurement.
- High resolution, 1% accuracy.
- Direct tonnage reading no calculation or conversion list.
- Digital monitor DM-1DA connecting cables, manual.

### Technical Data:

Strain Gauges	350 ohms
Measuring Range	± 800 $\mu\epsilon$
Sensitivity of sensor (1/2 bridge compensated)	1.0 mV/V @ F.S.
Linearity error in % of measuring value	< 0.5
Overall accuracy	± 0.5% F.S.
Repeatability	0.1% F.S.
Hysteresis	0.1% F.S.
Operating temperature range	+20...+60°C
Power supply	110...220 VAC / 50-60Hz
RS 485 output	Baud Rate 9600, N, 8, 1

**SENSORMATE Technology Inc.**

<http://www.sensormate.com.tw>  
TEL: + 886 2 2999 5245

E-mail: [sales@sensormate.com.tw](mailto:sales@sensormate.com.tw)  
Fax: + 886 2 2995 0782